


Syntax Error



Usermanual

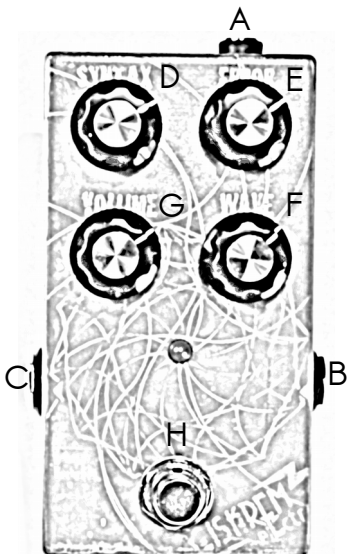

A Power Input

Accepts the standard 9 volts, center negative pedal power. 2,1mm plug.

B Signal Input

Input Z: 1M Ω minimum.

C Signal Output

Output Z: 10k Ω maximum.

D Syntax

Sets start frequency of modulation.

E Error

Amount of modulation.

F Wave

Blend from clean to gated fuzz.

G Volume

Output volume control.

H On/Off

True bypass, Led lights when ON

How it works

The Syntax Error is an interactive weird modulator. It “reads” the pitch and timbre of the input signal and generates a modulation frequency derived from it.

This frequency is then used to modulate the output signal. Ranging from tremolo through stutter to ringmodulation territory, it can really mess things up(!).

Output signal (which is later modulated) can be blended from clean signal to heavy square wave gated fuzz.

Attention!

No userservicable parts inside. Contact
Iskrem Electro for warranty claims and
repairs.

(((

)))



www.iskrem.org

electro@iskrem.org

Doyat - 38710 Mens - France